



FLOWGUARD® PLUS
CPVC PLUMBING SYSTEMS™

50 YEARS
TRUSTED AROUND
THE WORLD

WORLD'S NO.1* CPVC

NSF CERTIFIED FOR
SOLVENT CEMENT ONLY



pw-G-dwv-sw
U.P. Code

For Copper Tube Size
CPVC thru 2" Dia.
(50 mm) Interference Fit



GRIHA COUNCIL

Prince FlowGuard Plus
CPVC Plumbing Systems is
India's First CPVC to win GRIHA
Council Certification.



Pipes as per
IS: 15778



(SDR 11 & 13.5)

ASTM F 441 (SCH 40 & 80)

Fittings as per:

ASTM D 2846 (SDR 11)

ASTM F 438 (SCH 40)

ASTM F 439 (SCH 80)

*FlowGuard CPVC is No.1 based on the length of pipes installed.

Overview


Invented in 1959, used all over the world, established as a trusted product and now brought to you by Prince Pipes, FlowGuard Plus CPVC plumbing systems are built to last for generations. Designed for a service life of 50 years, these CPVC pipes and fittings can withstand temperatures up to 93°C and are ideal for hot and cold water applications. FlowGuard Plus advantage means low bacterial growth and therefore, safe and hygienic water. It is fire retardant and does not support combustion. Moreover, it has high tensile strength, 25% better pressure bearing capacity and unparalleled UV resistance.

Product range

• **Pipes:** 15 to 250mm (1/2 to 10 inch) • **Fittings:** 15 to 150mm (1/2 to 6 inch) • **Solvent Cement:** Tin: 59 to 946ml | Tube: 29.5 & 59ml

Standards

Pipes				Fittings			
Size (mm)	Class	Standard	End Connection	Size (mm)	Class	Standard	End Connection
15 to 50	SDR 11	IS 15778	Solvent Cement Joint	15 to 50	SDR 11	ASTM D 2846	• Solvent Cement Sockets Joint. • For transition joints, fittings with plastic threads & metal threaded inserts.
15 to 50	SDR 13.5	IS 15778		65 to 100	SCH 80	ASTM F 439	
65 to 250	SCH - 40	ASTM F 441		150	SCH 40	ASTM F 438	
65 to 250	SCH - 80	ASTM F 441		-	-	-	

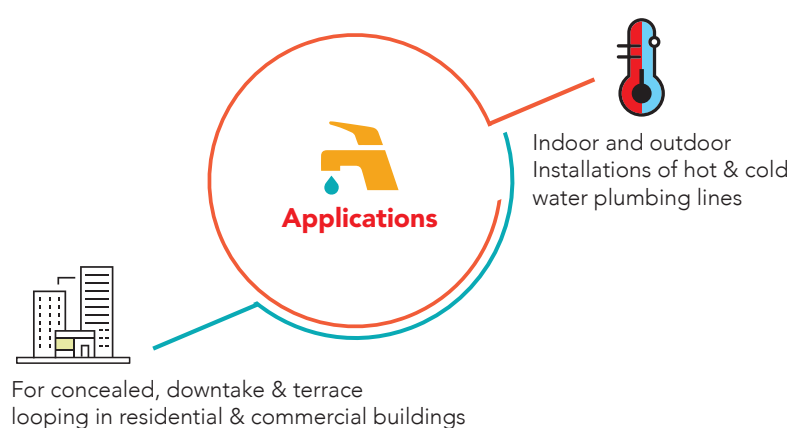

Features and benefits

- Lubrizol's NSF/ANSI 14 certified TEMPRITE® 88619 TAN 311 & TEMPRITE® 88096 TAN 311 CPVC compounds respectively
- Suitable for use up to 93°C
- High tensile and impact strength
- Freedom from toxicity & odours
- Low thermal expansion
- UV resistant
- **25% Higher pressure bearing capacity at higher temperatures**
- Consistent product quality
- Peace of mind assured
- Fire retardant
- No corrosion, leakage, scaling and pitting
- Lowest bacterial growth

Dimensions

Nominal Bore		Outside Diameter		SDR-11				SDR-13.5			
				Wall Thickness		Working Pressure		Wall Thickness		Working Pressure	
		Min	Max	Min	Max	At 27°C	At 82°C	Min	Max	At 27°C	At 82°C
(mm)	(inch)	(mm)	(mm)	(mm)	(mm)	(Kg/cm ²)	(Kg/cm ²)	(mm)	(mm)	(Kg/cm ²)	(Kg/cm ²)
15	1/2	15.80	16.00	1.70#	2.20#	28.14	6.93	1.40#	1.90#	22.22	5.60
20	3/4	22.10	22.30	2.00	2.50	28.14	6.93	1.70	2.20	22.22	5.60
25	1	28.50	28.70	2.60	3.10	28.14	6.93	2.10	2.60	22.22	5.60
32	1 ¼	34.80	35.00	3.20	3.70	28.14	6.93	2.60	3.10	22.22	5.60
40	1 ½	41.20	41.40	3.80	4.30	28.14	6.93	3.10	3.60	22.22	5.60
50	2	53.90	54.10	4.90	5.50	28.14	6.93	4.00	4.60	22.22	5.60

Nominal Bore		Outside Diameter		Schedule 40				Schedule 80			
				Wall Thickness		Working Pressure		Wall Thickness		Working Pressure	
				Min	Max	At 23°C	At 82°C	Min	Max	At 23°C	At 82°C
(mm)	(inch)	(mm)		(mm)	(mm)	(Kg/cm ²)	(Kg/cm ²)	(mm)	(mm)	(Kg/cm ²)	(Kg/cm ²)
65	2 ½	73.00 (+/- 0.18)		5.16	5.77	21.10	5.30	7.01	7.85	29.57	7.34
80	3	88.90 (+/- 0.20)		5.49	6.15	18.25	4.58	7.62	8.53	26.00	6.32
100	4	114.30 (+/- 0.23)		6.02	6.73	15.49	3.87	8.56	9.58	22.53	5.60
150	6	168.30 (+/- 0.28)		7.11	7.97	12.64	3.16	10.97	12.29	19.68	4.89
200	8	219.10 (+/- 0.38)		8.18	9.17	11.21	2.85	12.70	14.22	17.54	4.18
250	10	273.10 (+/- 0.38)		9.27	10.39	9.89	2.44	15.06	16.86	16.21	3.87

FlowGuard Plus CPVC has 25% higher pressure bearing capacity at higher temperatures

Note: • Dimensions with '#' are not a function of SDR

• Fittings are suitable for corresponding pipe pressure ratings