

SWR



ULTRAFIT[®]

SWR Piping Systems

**LEAK-PROOF SEWERAGE FOR
SEEPAGE-PROOF STRUCTURES.**



Pipes as per
IS 13592



Fittings as per
IS 14735

Product range

• Pipes:


- Rubber Ring Joint: 75 to 160 mm
- Solvent Joint: 40 to 200 mm

• Fittings:

- Rubber Ring Joint: 75, 90, 110 & 160 mm
- Solvent Joint: 40 to 160 mm

Standards

Pipes			Fittings			
Size (mm)	Standard	Type	End Connection	Size (mm)	Standard	End Connection
40 to 200	IS 13592	Type A For ventilation pipe work, rain water discharge and harvesting.	Rubber Ring & Solvent Joint	75, 90, 110, 160	IS 14735	Rubber Ring Joint
		Type B For soil and waste discharge system.		40 to 160		Solvent Joint

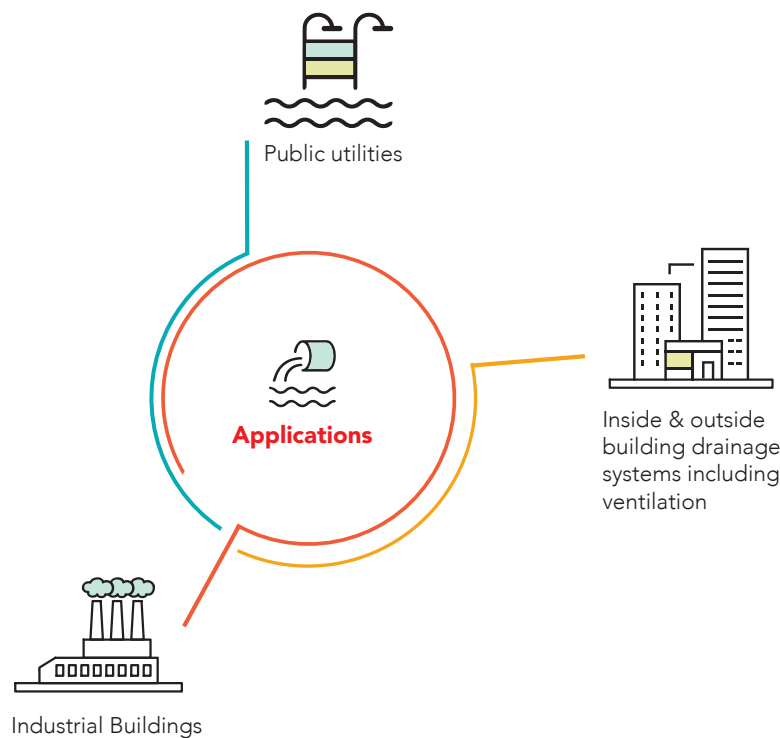

Features and benefits

- Lighter but strong
- Compatible with other drainage products
- Easy to install with low assembly force
- Smooth bore
- Cost-efficient
- Rubber ring seals ensure long term sealing performance against leakage.

AERATOR

SOLVENT JOINT | RUBBER RING JOINT
FOR SINGLE STACK SYSTEM



Technical details

Nominal Size (Outside Diameter)	Mean Outside Diameter		Wall Thickness			
			Type A		Type B	
	Minimum	Maximum	Minimum	Maximum	Minimum	Maximum
(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)
40	40.00	40.30	1.80	2.20	3.20	3.80
50	50.00	50.30	1.80	2.20	3.20	3.80
63	63.00	63.30	1.80	2.20	3.20	3.80
75	75.00	75.30	1.80	2.20	3.20	3.80
90	90.00	90.30	1.90	2.30	3.20	3.80
110	110.00	110.40	2.20	2.70	3.20	3.80
160	160.00	160.50	3.20	3.80	4.00	4.60
200	200.00	200.60	-	-	4.90	5.60